

Electromagnetic Formation Flight (EMFF)



NIAC Phase I Review

October 23-24, 2002

PI: David Miller

Co-I: Raymond Sedwick


Massachusetts Institute of Technology
Space Systems Laboratory

- Traditional propulsion uses propellant as a reaction mass
- Advantages
 - Ability to move center of mass of spacecraft
(Momentum conserved when propellant is included)
 - Independent (and complete) control of individual spacecraft
- Disadvantages
 - Propellant is a limited resource
 - Momentum conservation requires that propellant mass increase exponentially with the velocity increment (ΔV)
 - Some propellants can be a surface contaminant to precision optics and solar arrays
 - Lingering propellant clouds can obscure or blind infrared telescopes
- Is there an alternative ??

A Candidate Solution




- Yes... inter-spacecraft forces can be used...
 - ...provided it is not necessary to alter the center of mass motion of the system
- What forces must be transmitted between satellites to allow for all relative degrees of freedom to be controlled?
 - In 2 dimensions, N spacecraft have $3N$ DOFs, but we are at most able to control $3N-2$ (no translation of the center of mass)
 - For 2 spacecraft, that's a total of 4:

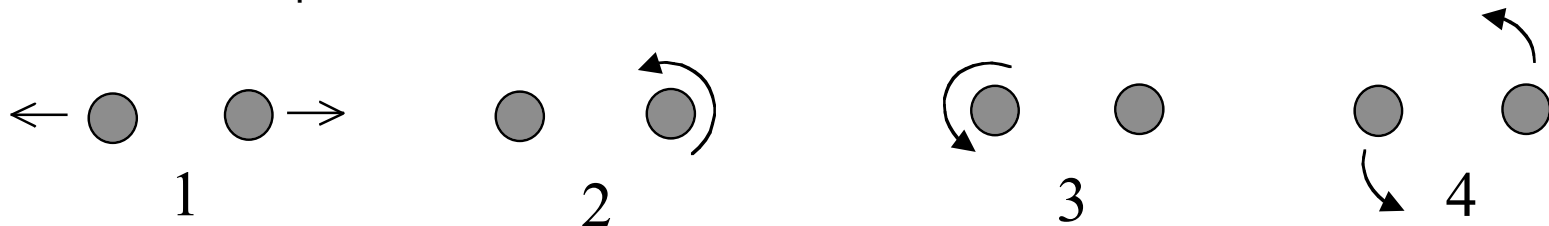


- DOFs 1-3 can be controlled with inter-spacecraft axial forces and on-board torques, but 4 requires a transverse force
- Electrostatic monopoles cannot provide this type of force, but Electromagnetic and electrostatic dipoles can!
- Tethers attached away from the center of mass of the spacecraft will also work, but that's a different project...
- So, are there missions where controlling cluster center of mass doesn't matter?


Terrestrial Planet Finder

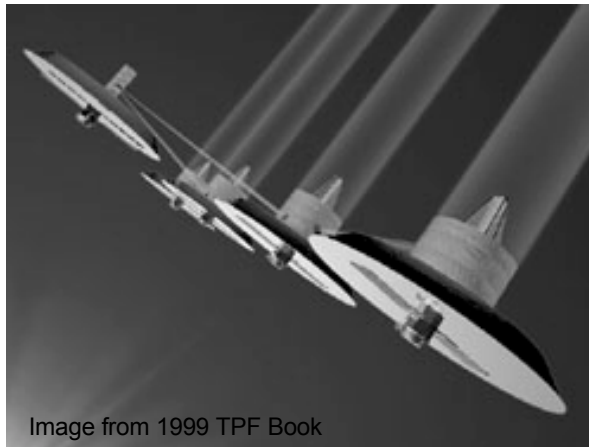


NGST

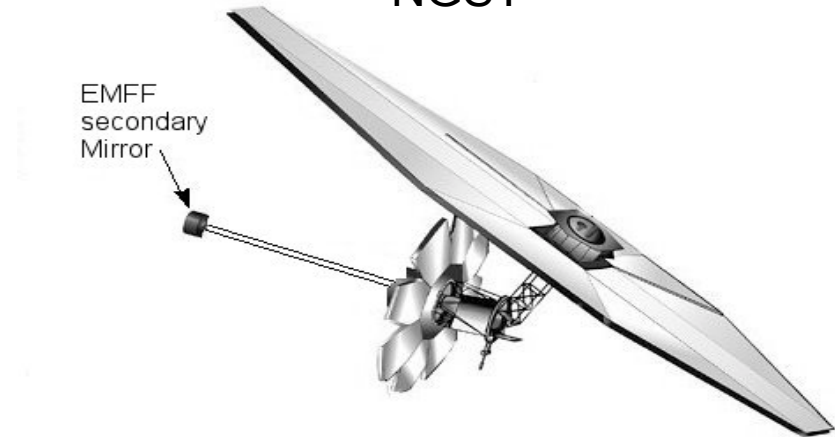


Cluster Reconfiguring

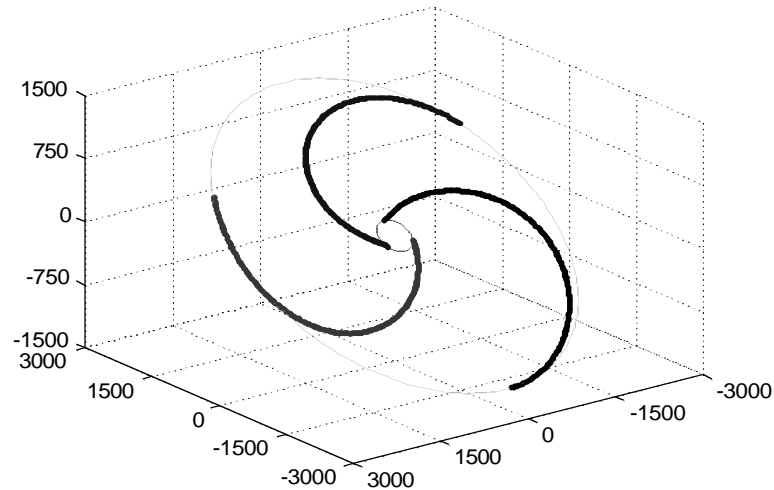


Docking

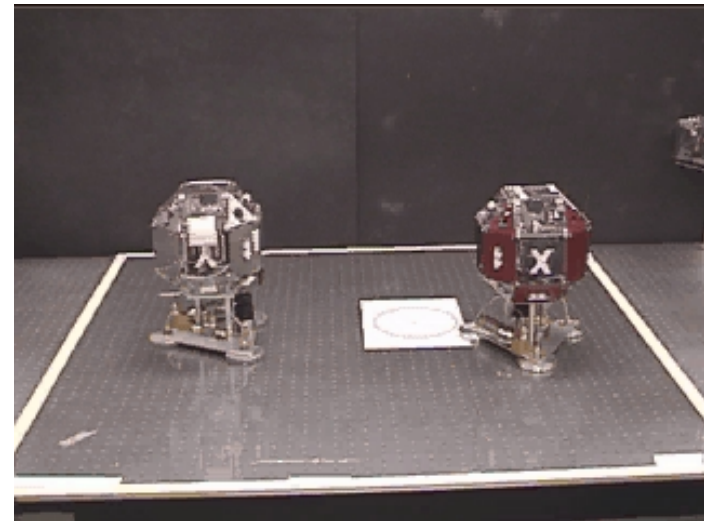

Reconfigurable Arrays & Staged Deployment

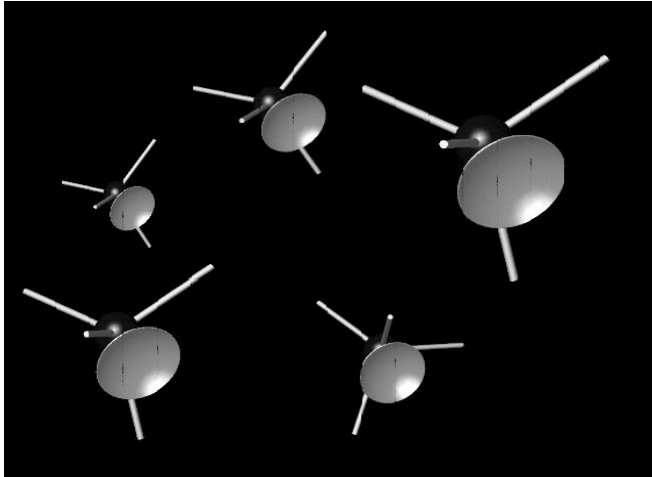

Adaptive Membrane for Imaging

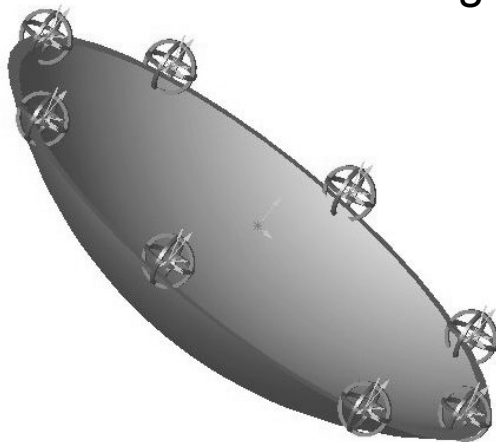

Planet Imager




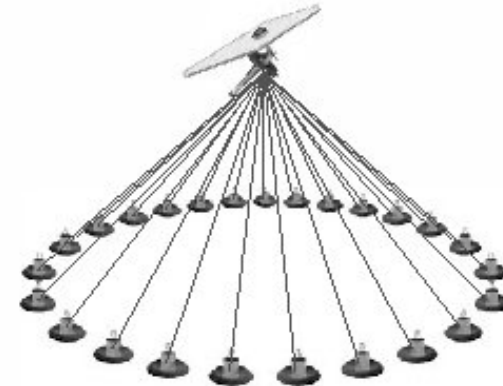


Image from 1999 TPF Book

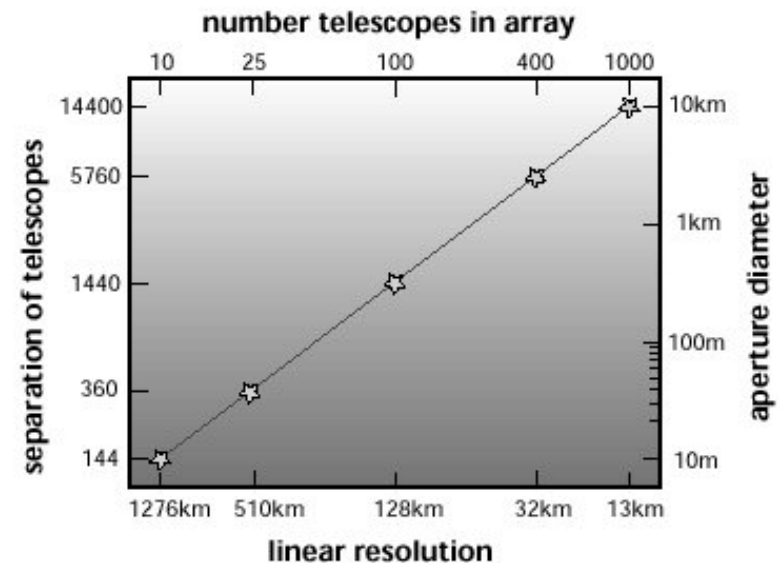

- Electromagnetic Dipoles

- Force Scaling:





$$F_{EM} \sim \frac{3\pi}{2} \mu_0 \left(\frac{a}{x} \right)^4 I^2 \quad \mu_0 = 4\pi(10^{-7}) \quad [N/A^2]$$

- a = coil radius, x = separation distance, I = current (Amp-turns)

- Electrostatic Dipoles

- Force Scaling:




$$F_{ES} \sim 24 \alpha^2 \pi \epsilon_0 \left(\frac{a}{x} \right)^4 V^2 \quad \epsilon_0 = 8.85(10^{-12}) \quad [N/V^2]$$

- a = electrode spacing, α = electrode radius / a , V = Voltage difference


$$\frac{F_{EM}}{F_{ES}} = \frac{1}{16\alpha^2} \frac{\mu_0}{\epsilon_0} \left(\frac{I}{V} \right)^2 \Rightarrow V \approx \left(\frac{94}{\alpha} \right) I \quad (\text{For break-even and comparable size})$$

Is This a Lot?

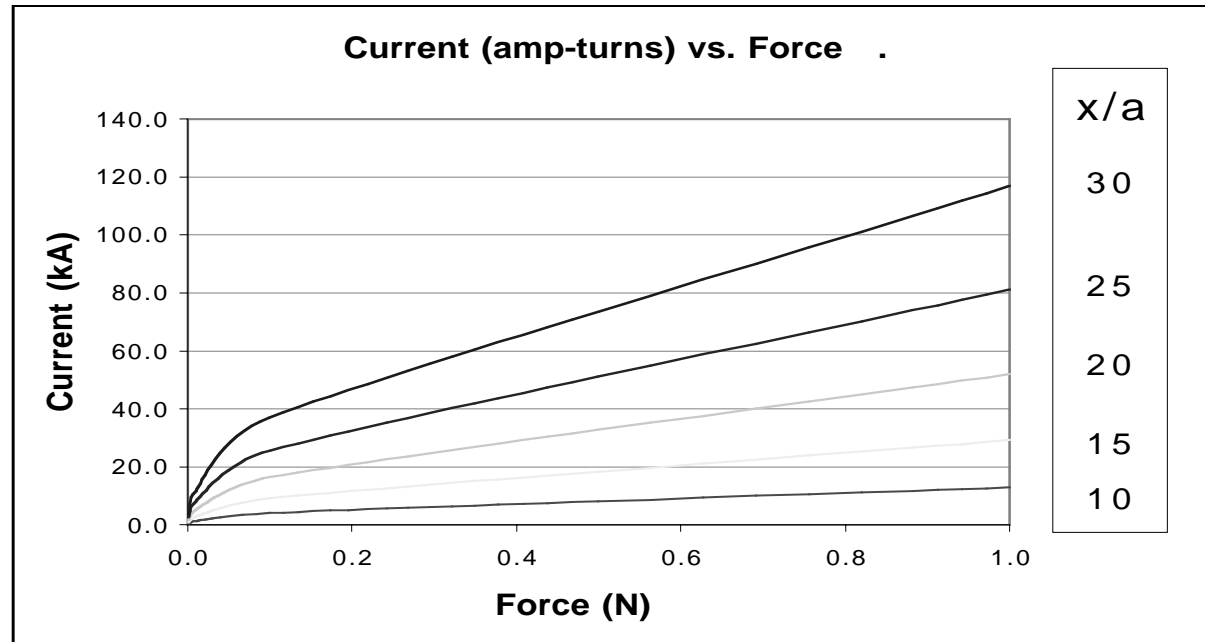

- For regular wire... yes (except for low force or close operations)
- For high temperature superconducting wire... no!
 - Commercially available wire will carry 13 kA/cm²
 - Laboratory demonstrations up to 6 MA/cm² (even in high B-field)
- However, voltages required for Electrostatics are prohibitive
- Debye shielding in LEO also a problem for electrostatics

- Using ferromagnetic cores in a tetrahedron, the dipole direction can be steered by energizing different combinations
- Tend to be heavy for a given force



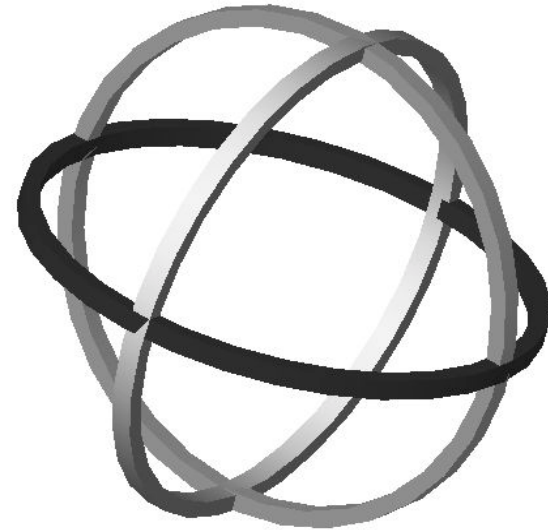


- Likewise, a set of 3 orthogonal coils can achieve the same effect
 - Much lighter weight
- A set of 3 orthogonal gimballed reaction wheels used in conjunction with these steerable dipoles will decouple spacecraft orientation from EM control
 - Gimbals could be locked during spin-up maneuver, and unlocked during steady-state spin to eliminate gyroscopic stiffening

Satellite Formation Spin-Up




- Electromagnets exert forces/torques on each other
 - Equal and opposite “shearing” forces
 - Torques in the same direction
- Reaction wheels counteract EM torques
 - Resultant is shearing force
 - Angular momentum conserved by spin of the system
- There are many possible combinations of EM strength and dipole orientation, causing different distributions of angular momentum storage.

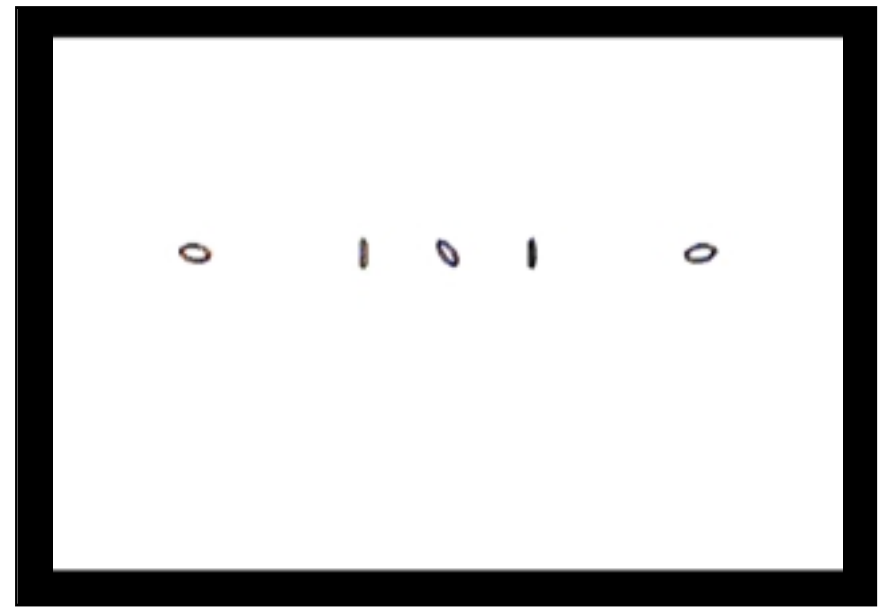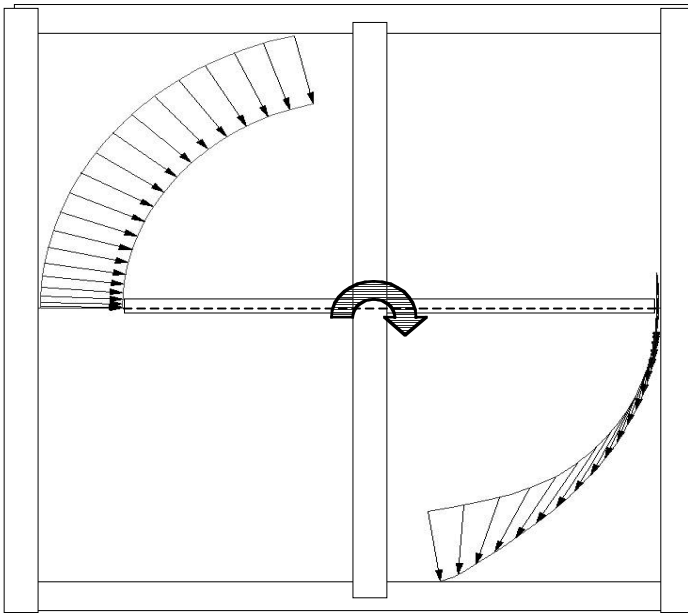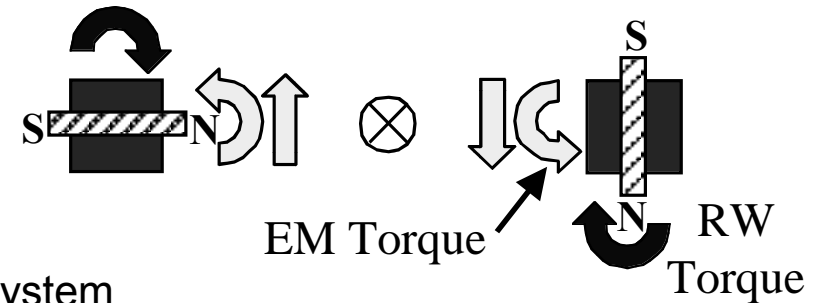

Steady-State Spin




- Steady-state spin
 - Constant spin rate for data collection
 - Relative position and orientation maintenance
 - Disturbance rejection
 - Linearized dynamics about nominal spin
- Optimal control design
 - Choose ratio of penalties on state and control $(\frac{\lambda}{\rho})$
 - Can stabilize dynamics and reject disturbances
- Experimental validation on linear air track
 - Similar unstable dynamics
 - Stabilized using optimal control

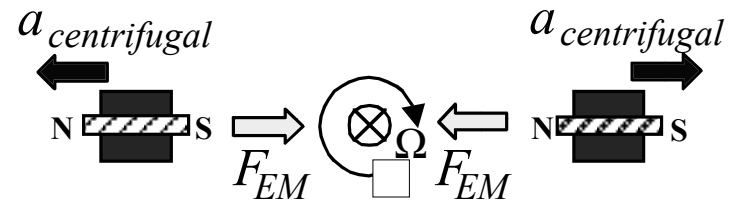


Unstable poles:

$$s_{1,2} = \pm \Omega$$


Open-Loop:

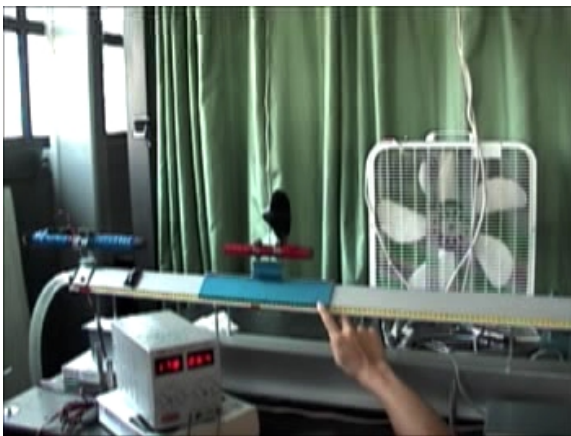


Closed-Loop:

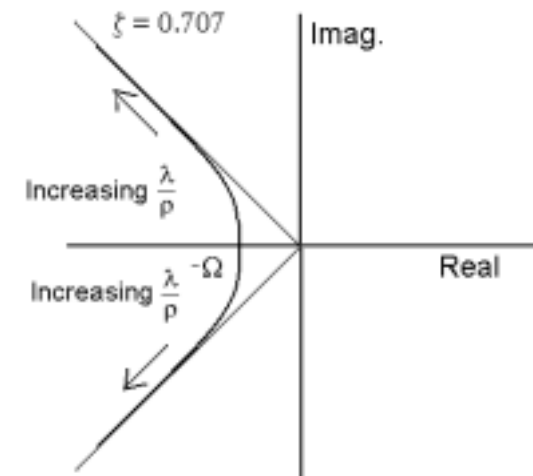

- Multiple trajectories to initialize or resize the EMFF cluster
- Can be framed as an optimal control problem with Quadratic cost function (Energy) and Linear dynamics (Hill Equations)
- Balancing between power requirements for reaction wheels and electromagnets
- Reaction wheel torques and power constraints must also be considered
- Previous work applied to TechSat 21 clusters for both cluster initialization and geo-location problems

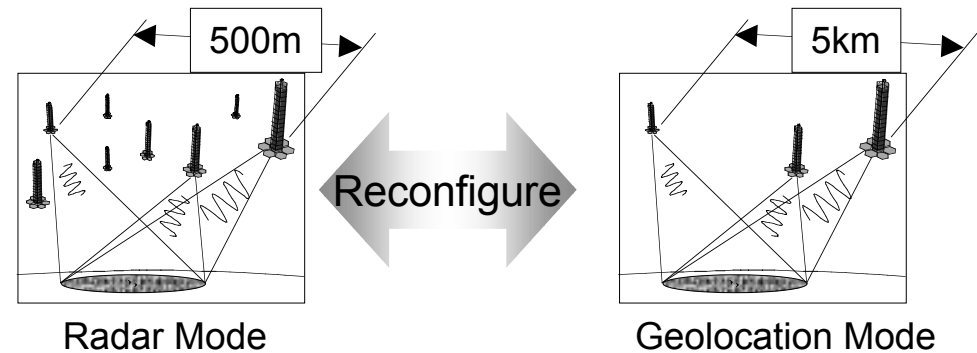

* Figure courtesy of AFOSR Techsat21 Research Review (29 Feb - 1 Mar 2000)

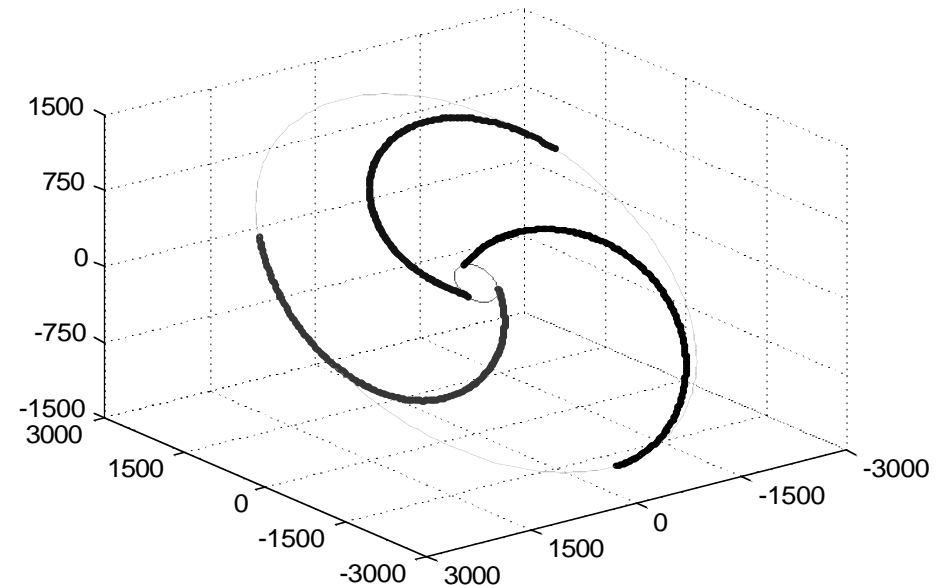


Optimal Techsat21 Cluster Re-sizing


Disturbance Rejection




- EMFF must counteract the disturbances present in LEO
 - Earth's Gravitational Potential (J_2)
 - Differential forces causes satellite formations to separate
 - Causes Satellite Formations to 'Tumble'
 - Differential Drag
 - Earth's Magnetic Field
- When counteracting the disturbances, EMFF produces unwanted torques on each spacecraft.
- Reaction wheels are used to temporarily store the change in the angular momentum
- The reaction wheels must be de-saturated by means other than traditional propulsion

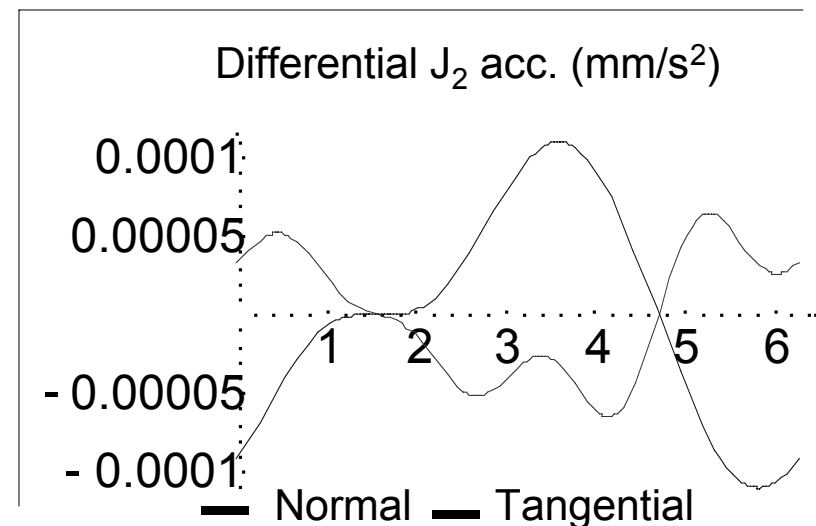

- Zero net angular momentum gain
 - There is a limited subset of formation designs that produce zero net angular momentum gain

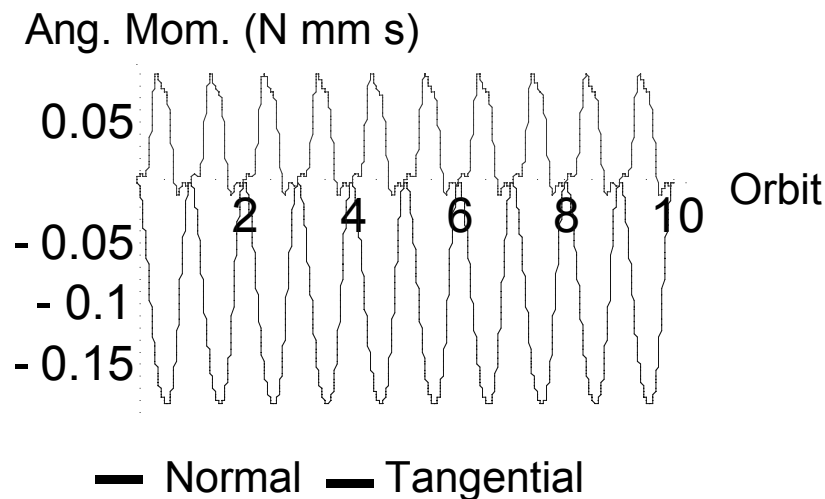


- Re-phasing of the formation
 - Re-phasing causes the torques to be applied in the opposite direction. Thus de-spinning the wheels.

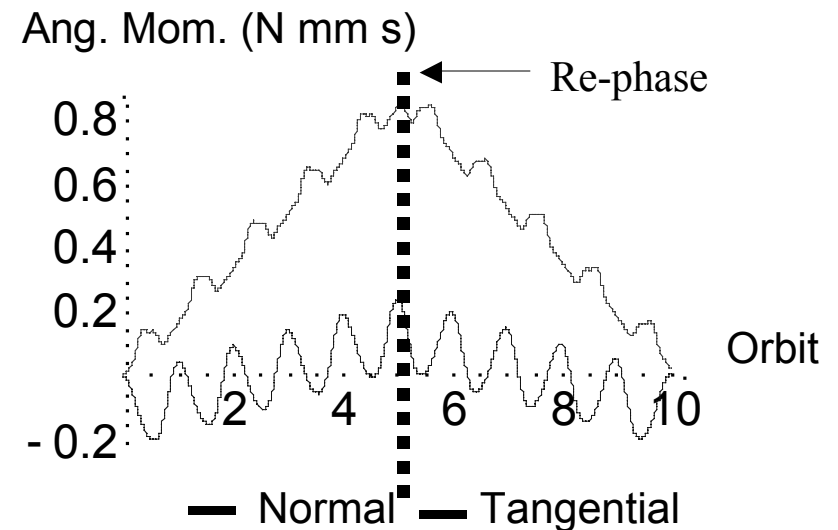

- Earth's magnetic field
 - By varying the dipole strength, the torque distribution can be varied without affecting the resulting forces.
 - If the Earth is considered as another dipole, some of the torques can be preferentially distributed to the earth

Case Study: TPF Retrofit

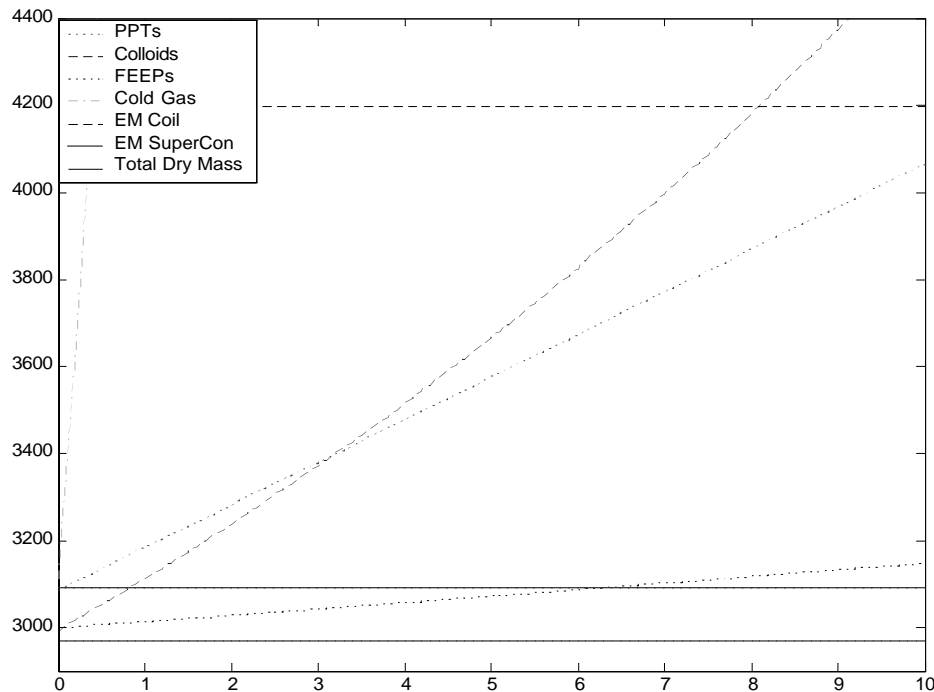



- Cold Gas and Colloids
 - Low I_{sp} systems translate to high propellant requirements
 - Not viable options
- PPTs
 - Higher efficiency system but still requires significant propellant over a 10 year mission lifetime
- FEEPs
 - Ideal for very short mission lifetime systems (less than 6 yrs)
 - Must consider contamination issue
- EM coil ($R = 4$ m) ($M_{tot} = 4198$ kg)
 - Less ideal option when compared to FEEPs even for long mission lifetime
- EM Super Conducting Coil ($R = 2$ m) ($M_{tot} = 3089$ kg)
 - Best option if mission lifetime of greater than 6.2 years is desired
 - No additional mass is required to increase mission lifetime

- Identical or Mother-Daughter Configuration for spinning case?
- Define Mass Fractions:

$$M_{inner} = \gamma M_{total\,array}$$

$$M_{outer} = \frac{\gamma-1}{2} M_{total\,array}$$

Center Spacecraft experiences no translation \rightarrow no mass penalty \rightarrow suggests larger center spacecraft

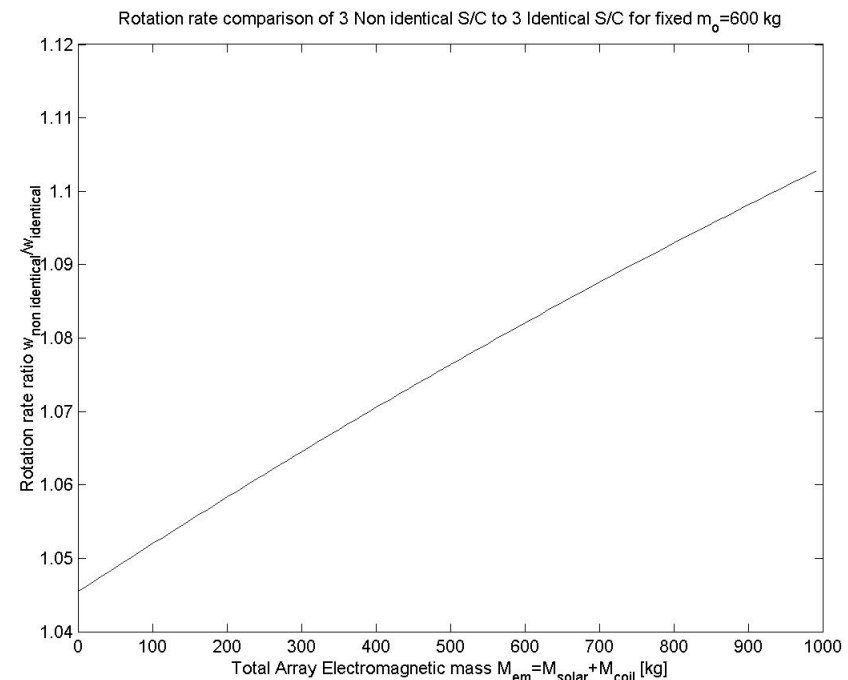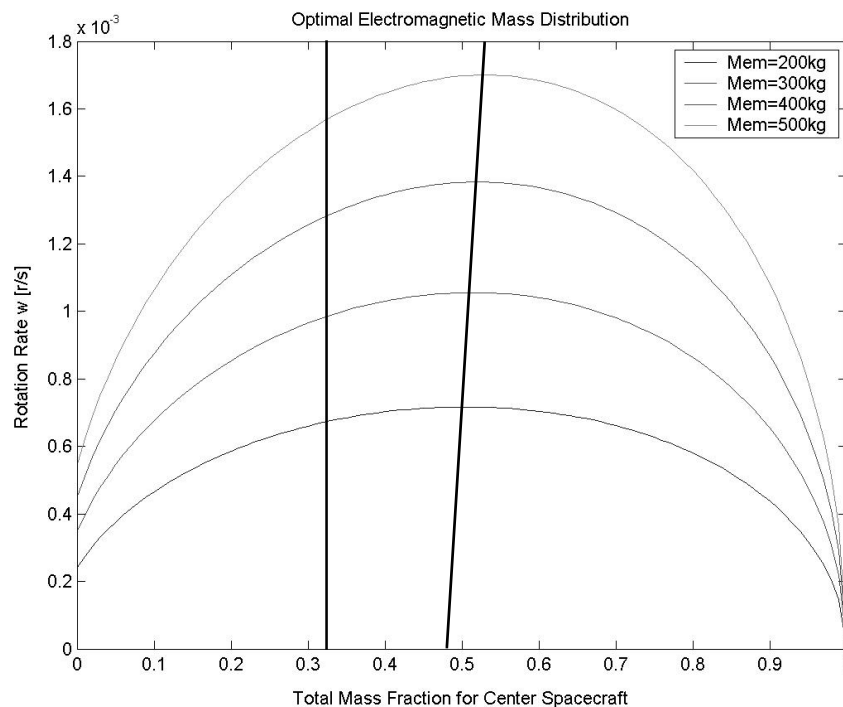

- Identical Configuration is non-optimal

- Higher rotation rate for mother-daughter configuration for fixed masses

Phase II Objectives



- Conduct more in-depth systems trades using various NASA missions
 - Terrestrial Planet Finder
 - Life Finder
 - Constellation-X
- Analyze impact on various subsystems
 - Tolerance of avionics
 - Inter-vehicle power coupling
 - Inter-vehicle communications
 - Angular momentum redistribution for enabling precision operations
- Formulate arbitrary n-body dynamics to analyze control complexity growth as a function of array growth
- Build a prototype to test simultaneous control in translation and rotation
 - Coordinate with undergraduate design-build class
 - Previous classes developed SPHERES and ARGOS testbeds
 - Provides opportunity for undergraduates to participate in, and have impact on, space research

Conclusions (1)



- Lifetime and contamination are two compelling reasons to seek alternate solutions to using propellants
- Dipole fields and reaction wheels can produce all of the necessary actuation for complete controllability of relative degrees of freedom
- There are many missions where relative DOF control is all that is necessary
 - Agencies that have interest: JPL, GSFC, LMCO, NRO
- Debye shielding in LEO, and problems with high E-fields in general make electrostatic dipoles less attractive (no pun intended)
 - Electrostatic monopoles could provide a stronger attractive force for constant spin rate, but charge exchange between spacecraft is an issue

Conclusions (2)



- Constrained Steady-state spin control has been demonstrated in hardware
- In LEO, disturbance rejection is the main concern and angular momentum management is the biggest problem
 - Three approaches: Zero net torque solution, Re-phasing, Using Earth's Field
- EMFF retrofit of TPF looks like the best solution if FEEP contamination is a high risk
- Optimal distribution of Torque for TPF-like maneuver is not necessarily to have identical spacecraft